


## T352AA - 75 PSI Radiator Hose

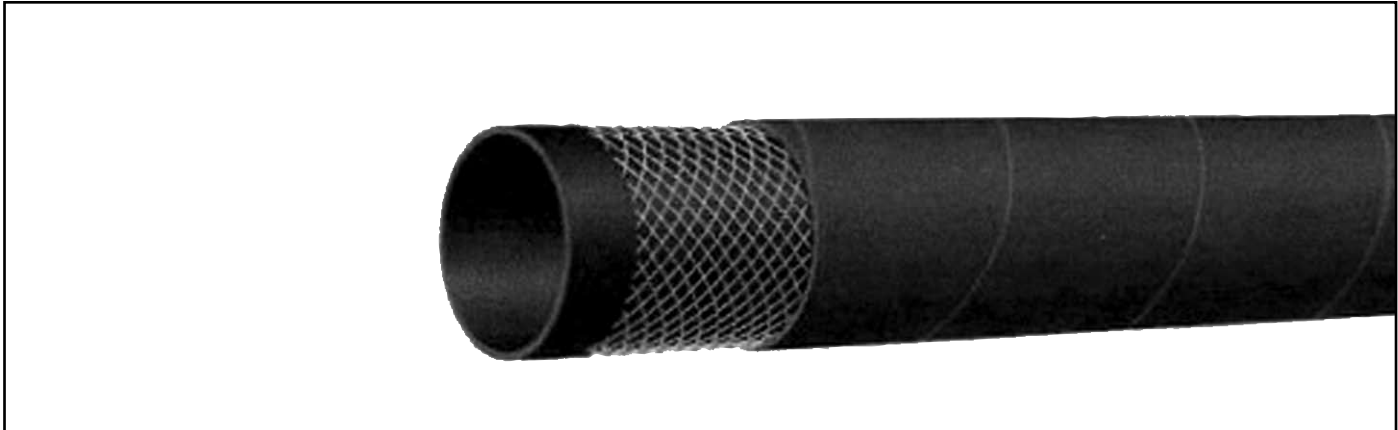

### APPLICATION

Radiator hose

### COVER

Black EPDM, heat, abrasion and ozone resistant rubber.

### REINFORCEMENT

High tensile textile cords.

### TUBE

Black EPDM rubber.

### TEMPERATURE RANGE

-40°F (-40°C) to 248°F (+120°C)

### STANDARD LENGTH

12'6" and 200' coils for 1/2" to 2" ID sizes, 12'6" coils for 2 3/16" to 5" sizes.

### WORKING PRESSURE

5 Bar (75 PSI)

### SAFETY FACTOR: 3:1

### BRANDING

ALFAGOMMA – ITALY – T-352 RADIATOR - DIN 73411 - dia mm (yellow transfer)

## Nominal Specifications

SERIES NO.	SIZE CODE	NOMINAL ID		NOMINAL OD		MAX. WORKING PRESSURE	APPROX. WT. lbs./100 ft.	AVAILABLE LENGTH
		(in.)	(mm)	(in.)	(mm)			
T352AA050X12.6	050	1/2	13	.83	21	75	19	12'6" Coil
T352AA050X200	050	1/2	13	.83	21	75	19	200' Coil
T352AA062X12.6	062	5/8	16	.94	24	75	22	12'6" Coil
T352AA062X200	062	5/8	16	.94	24	75	22	200' Coil
T352AA071X12.6	071	11/16	18	1.02	26	75	24	12'6" Coil
T352AA071X200	071	11/16	18	1.02	26	75	24	200' Coil
T352AA078X12.6	078	13/16	20	1.10	28	75	26	12'6" Coil
T352AA078X200	078	13/16	20	1.10	28	75	26	200' Coil
T352AA087X12.6	087	7/8	22	1.18	30	75	28	12'6" Coil
T352AA087X200	087	7/8	22	1.18	30	75	28	200' Coil
T352AA100X12.6	100	1	25	1.30	33	75	32	12'6" Coil
T352AA100X200	100	1	25	1.30	33	75	32	200' Coil
T352AA112X12.6	112	1 1/8	28	1.42	36	75	34	12'6" Coil
T352AA112X200	112	1 1/8	28	1.42	36	75	34	200' Coil

*continued*

BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE.

## T352AA - 75 PSI Radiator Hose - *Continued*

### Nominal Specifications - *Continued*

SERIES NO.	SIZE CODE	NOMINAL ID		NOMINAL OD		MAX. WORKING PRESSURE	APPROX. WT. lbs./100 ft.	AVAILABLE LENGTH
		(in.)	(mm)	(in.)	(mm)			
T352AA118X12.6	118	1 3/16	30	1.50	38	75	37	12'6" Coil
T352AA118X200	118	1 3/16	30	1.50	38	75	37	200' Coil
T352AA125X12.6	125	1 1/4	32	1.57	40	75	39	12'6" Coil
T352AA125X200	125	1 1/4	32	1.57	40	75	39	200' Coil
T352AA137X12.6	137	1 3/8	35	1.69	43	75	42	12'6" Coil
T352AA137X200	137	1 3/8	35	1.69	43	75	42	200' Coil
<b>T352AA150X12.6</b>	150	1 1/2	38	1.89	48	75	<b>57</b>	12'6" Coil
<b>T352AA150X200</b>	150	1 1/2	38	1.89	48	75	<b>57</b>	200' Coil
T352AA157X12.6	157	1 9/16	40	1.97	50	75	60	12'6" Coil
T352AA157X200	157	1 9/16	40	1.97	50	75	60	200' Coil
T352AA162X12.6	162	1 5/8	42	2.05	52	75	63	12'6" Coil
T352AA162X200	162	1 5/8	42	2.05	52	75	63	200' Coil
T352AA175X12.6	175	1 3/4	45	2.17	55	75	67	12'6" Coil
T352AA175X200	175	1 3/4	45	2.17	55	75	67	200' Coil
<b>T352AA189X12.6</b>	189	1 7/8	48	2.28	58	75	<b>70</b>	12'6" Coil
<b>T352AA189X200</b>	189	1 7/8	48	2.28	58	75	<b>70</b>	200' Coil
T352AA200X12.6	200	2	51	2.40	61	75	75	12'6" Coil
T352AA200X200	200	2	51	2.40	61	75	75	200' Coil
T352AA218X12.6	218	2 3/16	55	2.56	65	75	80	12'6" Coil
T352AA225X12.6	225	2 1/4	57	2.64	67	75	83	12'6" Coil
<b>T352AA238X12.6</b>	238	2 3/8	60	2.76	70	75	<b>86</b>	12'6" Coil
<b>T352AA250X12.6</b>	250	2 1/2	63	2.87	73	75	<b>90</b>	12'6" Coil
T352AA275X12.6	275	2 3/4	70	3.15	80	75	97	12'6" Coil
<b>T352AA300X12.6</b>	300	3	76	3.39	86	75	<b>104</b>	12'6" Coil
<b>T352AA315X12.6</b>	315	3 1/8	80	3.54	90	75	<b>110</b>	12'6" Coil
<b>T352AA354X12.6</b>	354	3 9/16	90	4.02	102	75	<b>136</b>	12'6" Coil
<b>T352AA400X12.6</b>	400	4	102	4.49	114	75	<b>152</b>	12'6" Coil
<b>T352AA450X12.6</b>	450	4 1/2	116	5.00	127	75	<b>169</b>	12'6" Coil
<b>T352AA500X12.6</b>	500	5	127	5.55	141	75	<b>216</b>	12'6" Coil

BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE.