

E-Series Straight-Through Interchange

- Smooth bore full-flow design ensures maximum flow with minimal pressure drop.
- Straight-through interchange nipples are available in brass, steel, and 303 stainless steel.
- 1-1/4" to 2" sleeves are plated steel to minimize incidents of brinelling during impulse service.
- Ideally suited for pressure wash equipment, steam cleaning machines, and mold coolant lines.
- Corrosion resistant components maximize service life in a variety of applications.

Performance Specifications	Operating Bar (PSI)	Coupled Burst Bar (PSI)	Flow Rate $\Delta P=1$ Bar	Locking Mechanism
1/8" steel	234 (3,400)	938 (13,600)	15 LPM (4 GPM)	8 Balls
1/4" steel	379 (5,500)	1,344 (19,500)	30 LPM (8 GPM)	8 Balls
3/8" steel	290 (4,200)	1,296 (18,800)	83 LPM (22 GPM)	8 Balls
1/2" steel	241 (3,500)	1,097 (15,900)	125 LPM (33 GPM)	8 Balls
3/4" steel	186 (2,700)	952 (13,800)	265 LPM (70 GPM)	8 Balls
1" steel	138 (2,000)	724 (10,500)	303 LPM (80 GPM)	8 Balls
1-1/4" steel	186 (2,700)	979 (14,200)	473 LPM (125 GPM)	8 Balls
1-1/2" steel	152 (2,200)	1,000 (14,500)	568 LPM (150 GPM)	8 Balls
2" steel	152 (2,200)	883 (12,800)	696 LPM (184 GPM)	8 Balls
1/8" brass	193 (2,800)	793 (11,500)	15 LPM (4 GPM)	8 Balls
1/4" brass	359 (5,200)	1,137 (16,500)	30 LPM (8 GPM)	8 Balls
3/8" brass	193 (2,800)	1,097 (15,900)	83 LPM (22 GPM)	8 Balls
1/2" brass	152 (2,200)	986 (14,300)	125 LPM (33 GPM)	8 Balls
3/4" brass	117 (1,700)	855 (12,400)	265 LPM (70 GPM)	8 Balls
1" brass	117 (1,700)	655 (9,500)	303 LPM (80 GPM)	8 Balls
1-1/4" brass	117 (1,700)	724 (10,500)	473 LPM (125 GPM)	8 Balls
1-1/2" brass	97 (1,400)	593 (8,600)	568 LPM (150 GPM)	8 Balls
2" brass	97 (1,400)	593 (8,600)	696 LPM (184 GPM)	8 Balls
1/8" 303 SS	234 (3,400)	938 (13,600)	15 LPM (4 GPM)	8 Balls
1/4" 303 SS	379 (5,500)	1,344 (19,500)	30 LPM (8 GPM)	8 Balls
3/8" 303 SS	290 (4,200)	1,296 (18,800)	83 LPM (22 GPM)	8 Balls
1/2" 303 SS	241 (3,500)	1,097 (15,900)	125 LPM (33 GPM)	8 Balls
3/4" 303 SS	186 (2,700)	952 (13,800)	265 LPM (70 GPM)	8 Balls
1" 303 SS	138 (2,000)	724 (10,500)	303 LPM (80 GPM)	8 Balls
1-1/4" 303 SS	186 (2,700)	979 (14,200)	473 LPM (125 GPM)	8 Balls
1-1/2" 303 SS	152 (2,200)	1,000 (14,500)	568 LPM (150 GPM)	8 Balls
2" 303 SS	152 (2,200)	883 (12,800)	696 LPM (184 GPM)	8 Balls


* Steel performance specifications are as a result of using a steel plug with a brass coupler.

** Brass performance specifications are as a result of using a brass plug with a brass coupler.

*** 303 stainless steel working pressure is as a result of using a 303 stainless steel plug with a 303 stainless steel coupler.

Please Note: Operating pressures for the E-Series couplings utilizing hose barb end connections may be dramatically reduced to that of the hose rating and/or hose and end connection combination. Consult hose manufacturer's catalog for hose end connection ratings. If in doubt, test under controlled conditions for suitability to application. Dixon Quick Coupling cannot assume liability for misapplication of products resulting in equipment down-time, lost production, property damage and/or personal injury including death.


'E' Series Interchange	Parker	Foster	Tomco	Hansen
1/8"	ST-Series	FST-Series	Series ST	Series ST
1/4"	ST-Series	FST-Series	Series ST	Series ST
3/8"	ST-Series	FST-Series	Series ST	Series ST
1/2"	ST-Series	FST-Series	Series ST	Series ST
3/4"	ST-Series	FST-Series	Series ST	Series ST
1"	ST-Series	FST-Series	Series ST	Series ST
1-1/4"	ST-Series	FST-Series	Series ST	Series ST
1-1/2"	ST-Series	FST-Series	Series ST	Series ST
2"	---	---	---	Series ST

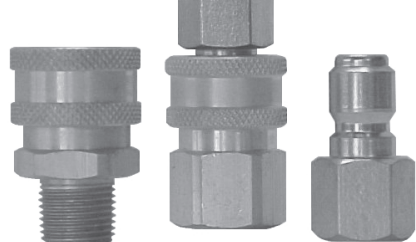

E-Series

E-Series Straight-Through Interchange (Coupler)

Part Number	Body Size	Thread Size	Body Material	Weight (lb)	Bag Qty	Pack Qty
1EM1-B	1/8"	1/8"-27 NPTF	brass	0.06	250	500
1EM1-S	1/8"	1/8"-27 NPTF	303 SS	0.05	250	500
2EM2-B	1/4"	1/4"-18 NPTF	brass	0.17	50	200
2EM2-S	1/4"	1/4"-18 NPTF	303 SS	0.15	50	200
3EM3-B	3/8"	3/8"-18 NPTF	brass	0.26	50	200
3EM3-S	3/8"	3/8"-18 NPTF	303 SS	0.24	50	200
4EM4-B	1/2"	1/2"-14 NPTF	brass	0.43	25	100
4EM4-S	1/2"	1/2"-14 NPTF	303 SS	0.37	25	100
6EM6-B	3/4"	3/4"-14 NPTF	brass	0.62	15	60
6EM6-S	3/4"	3/4"-14 NPTF	303 SS	0.57	15	60
8EM8-B	1"	1"-11 1/2 NPTF	brass	0.99	15	30
8EM8-S	1"	1"-11 1/2 NPTF	303 SS	0.93	15	30
10EM10-B	1-1/4"	1-1/4" - 11 1/2 NPTF	brass	1.64	---	10
12EM12-B	1-1/2"	1-1/2" - 11 1/2 NPTF	brass	2.04	---	5
16EM16-B	2"	2" - 11 1/2" NPTF	brass	3.16	---	1



(Male Thread)

E-Series Straight-Through Interchange (Nipple)


Part Number	Body Size	Thread Size	Body Material	Weight (lb)	Bag Qty	Pack Qty
E1M1	1/8"	1/8"-27 NPTF	steel	0.02	250	500
E1M1-B	1/8"	1/8"-27 NPTF	brass	0.02	250	500
E1M1-S	1/8"	1/8"-27 NPTF	303 SS	0.02	250	500
E2M2	1/4"	1/4"-18 NPTF	steel	0.05	50	200
E2M2-B	1/4"	1/4"-18 NPTF	brass	0.06	50	200
E2M2-S	1/4"	1/4"-18 NPTF	303 SS	0.05	50	200
E3M3	3/8"	3/8"-18 NPTF	steel	0.07	50	200
E3M3-B	3/8"	3/8"-18 NPTF	brass	0.08	50	200
E3M3-S	3/8"	3/8"-18 NPTF	303 SS	0.08	50	200
E4M4	1/2"	1/2"-14 NPTF	steel	0.13	35	140
E4M4-B	1/2"	1/2"-14 NPTF	brass	0.15	35	140
E4M4-S	1/2"	1/2"-14 NPTF	303 SS	0.13	35	140
E6M6	3/4"	3/4"-14 NPTF	steel	0.21	25	100
E6M6-B	3/4"	3/4"-14 NPTF	brass	0.23	25	100
E6M6-S	3/4"	3/4"-14 NPTF	303 SS	0.22	25	100
E8M8	1"	1"-11 1/2 NPTF	steel	0.43	25	50
E8M8-B	1"	1"-11 1/2 NPTF	brass	0.48	25	50
E8M8-S	1"	1"-11 1/2 NPTF	303 SS	0.43	25	50
E10M10	1-1/4"	1-1/4"-11 1/2 NPTF	steel	0.96	---	10
E10M10-B	1-1/4"	1-1/4"-11 1/2 NPTF	brass	0.96	---	10
E12M12	1-1/2"	1-1/2"-11 1/2 NPTF	steel	1.46	---	5
E12M12-B	1-1/2"	1-1/2"-11 1/2 NPTF	brass	1.46	---	5
E16M16	2"	2"-11 1/2 NPTF	steel	1.54	---	1
E16M16-B	2"	2"-11 1/2 NPTF	brass	1.50	---	1



(Male Thread)

E-Series Straight-Through Interchange (Coupler)

Part Number	Body Size	Barb Configuration	Body Material	Weight (lb)	Bag Qty	Pack Qty
2ES2-B	1/4"	1/4" Hose Barb	brass	0.16	50	200
3ES3-B	3/8"	3/8" Hose Barb	brass	0.21	50	200
4ES4-B	1/2"	1/2" Hose Barb	brass	0.31	25	100
6ES6-B	3/4"	3/4" Hose Barb	brass	0.49	15	60
8ES8-B	1"	1" Hose Barb	brass	0.68	15	30



(Standard Hose Barb)

E-Series Straight-Through Interchange (Coupler)


Part Number	Body Size	Barb Configuration	Body Material	Weight (lb)	Bag Qty	Pack Qty
E2S2	1/4"	1/4" Hose Barb	steel	0.05	50	200
E2S2-B	1/4"	1/4" Hose Barb	brass	0.06	50	200
E3S3	3/8"	3/8" Hose Barb	steel	0.08	50	200
E3S3-B	3/8"	3/8" Hose Barb	brass	0.08	50	200
E4S4	1/2"	1/2" Hose Barb	steel	0.13	35	140
E4S4-B	1/2"	1/2" Hose Barb	brass	0.13	35	140
E6S6	3/4"	3/4" Hose Barb	steel	0.21	25	100
E6S6-B	3/4"	3/4" Hose Barb	brass	0.21	25	100
E8S8	1"	1" Hose Barb	steel	0.43	25	50
E8S8-B	1"	1" Hose Barb	brass	0.46	25	50



(Standard Hose Barb)

E-Series


E-Series Straight-Through Interchange (Coupler)



(Female Thread)

Part Number	Body Size	Thread Size	Body Material	Weight (lb)	Bag Qty	Pack Qty
1EF1-B	1/8"	1/8"-27 NPTF	brass	0.06	250	500
1EF1-S	1/8"	1/8"-27 NPTF	303 SS	0.05	250	500
2EF2-B	1/4"	1/4"-18 NPTF	brass	0.17	50	200
2EBF2-B	1/4"	G1/4"	brass	0.17	50	200
2EF2-S	1/4"	1/4"-18 NPTF	303 SS	0.15	50	200
3EF3-B	3/8"	3/8"-18 NPTF	brass	0.26	50	200
3EBF3-B	3/8"	G3/8"	brass	0.26	50	200
3EF3-S	3/8"	3/8"-18 NPTF	303 SS	0.24	50	200
4EF4-B	1/2"	1/2"-14 NPTF	brass	0.39	25	100
4EBF4-B	1/2"	G1/2"	brass	0.39	25	100
4EF4-S	1/2"	1/2"-14 NPTF	303 SS	0.37	25	100
6EF6-B	3/4"	3/4"-14 NPTF	brass	0.62	15	60
6EBF6-B	3/4"	G3/4"	brass	0.62	15	60
6EF6-S	3/4"	3/4"-14 NPTF	303 SS	0.57	15	60
8EF8-B	1"	1"-11 1/2 NPTF	brass	0.99	15	30
8EBF8-B	1"	G1"	brass	0.99	15	30
8EF8-S	1"	1"-11 1/2 NPTF	303 SS	0.93	15	30
10EF10-B	1-1/4"	1-1/4"-11 1/2 NPTF	brass	1.38	---	10
10EF10-S	1-1/4"	1-1/4"-11 1/2 NPTF	303 SS	1.38	---	10
12EF12-B	1-1/2"	1-1/2"-11 1/2 NPTF	brass	1.42	---	5
12EF12-S	1-1/2"	1-1/2"-11 1/2 NPTF	303 SS	1.42	---	5
16EF16-B	2"	2"-11 1/2 NPTF	brass	0.30	---	1
16EF16-S	2"	2"-11 1/2 NPTF	303 SS	0.28	---	1

E-Series Straight-Through Interchange (Nipple)



(Female Thread)

Part Number	Body Size	Thread Size	Body Material	Weight (lb)	Bag Qty	Pack Qty
E1F1	1/8"	1/8"-27 NPTF	steel	0.03	250	500
E1F1-B	1/8"	1/8"-27 NPTF	brass	0.03	250	500
E1F1-S	1/8"	1/8"-27 NPTF	303 SS	0.02	250	500
E2F2	1/4"	1/4"-18 NPTF	steel	0.07	50	200
E2F2-B	1/4"	1/4"-18 NPTF	brass	0.07	50	200
E2BF2-B	1/4"	G1/4"	brass	0.07	50	200
E2F2-S	1/4"	1/4"-18 NPTF	303 SS	0.07	50	200
E3F3	3/8"	3/8"-18 NPTF	steel	0.11	50	200
E3F3-B	3/8"	3/8"-18 NPTF	brass	0.12	50	200
E3BF3-B	3/8"	G3/8"	brass	0.12	50	200
E3F3-S	3/8"	3/8"-18 NPTF	303 SS	0.11	50	200
E4F4	1/2"	1/2"-14 NPTF	steel	0.21	35	140
E4F4-B	1/2"	1/2"-14 NPTF	brass	0.23	35	140
E4BF4-B	1/2"	G1/2"	brass	0.23	35	140
E4F4-S	1/2"	1/2"-14 NPTF	303 SS	0.21	35	140
E6F6	3/4"	3/4"-14 NPTF	steel	0.32	25	100
E6F6-B	3/4"	3/4"-14 NPTF	brass	0.33	25	100
E6BF6-B	3/4"	G3/4"	brass	0.33	25	100
E6F6-S	3/4"	3/4"-14 NPTF	303 SS	0.32	25	100
E8F8	1"	1"-11 1/2 NPTF	steel	0.49	25	50
E8F8-B	1"	1"-11 1/2 NPTF	brass	0.52	25	50
E8BF8-B	1"	G1"	brass	0.52	25	50
E8F8-S	1"	1"-11 1/2 NPTF	303 SS	0.48	25	50
E10F10	1-1/4"	1-1/4"-11 1/2 NPTF	steel	0.85	---	10
E10F10-B	1-1/4"	1-1/4"-11 1/2 NPTF	brass	0.85	---	10
E10F10-S	1-1/4"	1-1/4"-11 1/2 NPTF	303 SS	0.85	---	10
E12F12	1-1/2"	1-1/2"-11 1/2 NPTF	steel	1.45	---	5
E12F12-B	1-1/2"	1-1/2"-11 1/2 NPTF	brass	1.45	---	5
E12F12-S	1-1/2"	1-1/2"-11 1/2 NPTF	303 SS	1.45	---	5
E16F16	2"	2"-11 1/2 NPTF	steel	0.30	---	1
E16F16-B	2"	2"-11 1/2 NPTF	brass	0.28	---	1
E16F16-S	2"	2"-11 1/2 NPTF	303 SS	0.30	---	1

EA-Series Water-Blast Interchange


- 'Maxi-Latch' retention system maximizes nipple retention while reducing incidents of brinneling.
- Nipple mounted sleeve guard protects against accidental disconnection.
- Smooth bore full-flow design ensures maximum flow with minimal pressure drop.
- Heavy duty knurled sleeves with locking pin provide maximum protection against brinneling and accidental disconnection.
- Steel body components maximize service life by resisting the effects of brinneling and internal erosion.



Performance Specifications	Operating Bar (PSI)	Min. Burst Bar (PSI)	Flow Rate $\Delta P=1$ Bar	Locking Mechanism
1/2"	700 (10,000)	2,069 (30,000)	227 LPM (60 GPM)	Maxi-Latch
'EA' Series Interchange	Parker	Aeroquip	Snap-Tite	---
1/2"	Series 'WB'	FD69	56-Series	---

EA-Series Water-Blast Interchange (Coupler)


Part Number	Body Size	Thread Size	Body Material	Weight (lb)	Bag Qty	Pack Qty
4EAF3	1/2"	3/8"-18 NPTF	steel	0.68	5	25
4EAF4	1/2"	1/2"-14 NPTF	steel	0.65	5	25



(Female Thread)


EA-Series Water-Blast Interchange (Nipple)

Part Number	Body Size	Thread Size	Body Material	Weight (lb)	Bag Qty	Pack Qty
EA4F3	1/2"	3/8"-18 NPTF	steel	0.38	5	25
EA4F4	1/2"	1/2"-14 NPTF	steel	0.34	5	25



(Female Thread)

CM-Series Mold Coolant Interchange

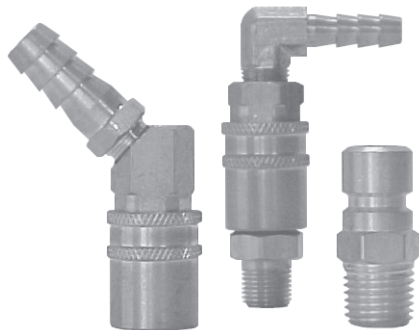


- Non-Valved straight-through couplers are available to maximize flow performance.
- Valved couplers provide automatic shut-off upon disconnection to avoid fluid loss while hoses are not coupled.
- Silicone sealing gaskets are standard and will optimize performance in coolant applications. Range: -68°C to +205°C (-90°F to +400°F)
- Wide variety of sizes and end configurations ensures versatility in a wide variety of applications.
- Highly durable and corrosion resistant materials will optimize longevity and improve performance.

Performance Specifications	Operating Bar (PSI)	Burst Bar (PSI)	Unvalved Flow Rate	Valved Flow Rate
1/4"	14 (200)	69 (1,000)	23 LPM (6 GPM)	13 LPM (3.5 GPM)
3/8"	14 (200)	69 (1,000)	50 LPM (13 GPM)	26 LPM (7 GPM)
1/2"	14 (200)	69 (1,000)	132 LPM (35 GPM)	76 LPM (20 GPM)


'CM' Series Interchange	Foster	Hansen	Tomco	Parker
1/4"	Series 'FJT'	Flo-Temp	MC200	Moldmate
3/8"	Series 'FJT'	Flo-Temp	MC300	Moldmate
1/2"	Series 'FJT'	Flo-Temp	MC500	Moldmate

CM-Series Industrial Mold Interchange (Nipple)




Part Number	Body Size	Thread Size	Body Material	Weight (lb)	Bag Qty	Pack Qty
CM2F1	1/4"	1/8"-27 NPT	steel	0.02	10	100
CM2F1-B	1/4"	1/8"-27 NPT	brass	0.02	10	100
CM2F2	1/4"	1/4"-18 NPT	steel	0.04	10	100
CM2F2-B	1/4"	1/4"-18 NPT	brass	0.05	10	100
CM2F3	1/4"	3/8"-18 NPT	steel	0.08	10	100
CM2F3-B	1/4"	3/8"-18 NPT	brass	0.08	10	100
CM3F2	3/8"	1/4"-18 NPT	steel	0.05	10	50
CM3F2-B	3/8"	1/4"-18 NPT	brass	0.05	10	50
CM3F3	3/8"	3/8"-18 NPT	steel	0.06	10	50
CM3F3-B	3/8"	3/8"-18 NPT	brass	0.07	10	50
CM4F4-B	1/2"	1/2"-14 NPT	brass	0.09	5	30
CM4F6-B	1/2"	3/4"-14 NPT	brass	0.10	5	30

CM-Series Industrial Mold Interchange (Nipple)



Part Number	Body Size	Thread Size	Body Material	Weight (lb)	Bag Qty	Pack Qty
CM2M1-B	1/4"	1/8"-27 NPT	brass	0.02	10	100
CM2M2-B	1/4"	1/4"-18 NPT	brass	0.03	10	100
CM2M3-B	1/4"	3/8"-18 NPT	brass	0.05	10	100
CM3M2-B	3/8"	1/4"-18 NPT	brass	0.04	10	50
CM3M3-B	3/8"	3/8"-18 NPT	brass	0.06	10	50
CM3M4-B	3/8"	1/2"-14 NPT	brass	0.07	10	50
CM4M4-B	1/2"	1/2"-14 NPT	brass	0.10	5	30
CM4M6-B	1/2"	3/4"-14 NPT	brass	0.11	5	30

Counterbored mold ports will protect the male threaded nipple, allowing the nipple to be mounted below the surface, simplifying storing and handling of molds. Perfecting male threaded plugs are constructed of corrosion resistant brass to maximize longevity in moist environments.



Part Number	Body Size	Thread Size	Dimension 'A'	Dimension 'B'
CM2M1-B	1/4"	1/8"-27 NPT	17.5mm (0.69")	17.5mm (0.69")
CM2M2-B	1/4"	1/4"-18 NPT	21.3mm (0.84")	23.9mm (0.94")
CM2M3-B	1/4"	3/8"-18 NPT	25.4mm (1.00")	24.6mm (0.97")
CM3M2-B	3/8"	1/4"-18 NPT	17.5mm (0.69")	23.9mm (0.94")
CM3M3-B	3/8"	3/8"-18 NPT	21.3mm (0.84")	28.7mm (1.13")
CM3M4-B	3/8"	1/2"-14 NPT	25.4mm (1.00")	31.8mm (1.25")
CM4M4-B	1/2"	1/2"-14 NPT	31.8mm (1.25")	38.1mm (1.50")
CM4M6-B	1/2"	3/4"-14 NPT	38.1mm (1.50")	39.6mm (1.56")

CM-Series Industrial Mold Interchange (Unvalved Coupler)

Part Number	Body Size	Thread Size	Body Material	Weight (lb)	Bag Qty	Pack Qty
2CMF1-B-E	1/4"	1/8"-27 NPT	brass	0.07	10	100
2CMF2-B-E	1/4"	1/4"-18 NPT	brass	0.08	10	100
3CMF2-B-E	3/8"	1/4"-18 NPT	brass	0.21	10	50
3CMF3-B-E	3/8"	3/8"-18 NPT	brass	0.23	10	50
4CMF4-B-E	1/2"	1/2"-14 NPT	brass	0.34	5	30



(Female Thread)

CM-Series Industrial Mold Interchange (Unvalved Coupler)


Part Number	Body Size	Barb Configuration	Body Material	Weight (lb)	Bag Qty	Pack Qty
2CMS2-B-E	1/4"	1/4" Hose Barb	brass	0.10	10	100
2CMB2-B-E	1/4"	1/4" Push-Loc	brass	0.10	10	100
2CMS2.5-B-E	1/4"	5/16" Hose Barb	brass	0.09	10	100
2CMS3-B-E	1/4"	3/8" Hose Barb	brass	0.09	10	100
2CMB3-B-E	1/4"	3/8" Push-Loc	brass	0.11	10	100
3CMS3-B-E	3/8"	3/8" Hose Barb	brass	0.24	10	50
3CMB3-B-E	3/8"	3/8" Push-Loc	brass	0.26	10	50
3CMS4-B-E	3/8"	1/2" Hose Barb	brass	0.25	10	50
3CMB4-B-E	3/8"	1/2" Push-Loc	brass	0.25	10	50
4CMS4-B-E	1/2"	1/2" Hose Barb	brass	0.46	5	30
4CMB4-B-E	1/2"	1/2" Push-Loc	brass	0.50	5	30
4CMS6-B-E	1/2"	3/4" Hose Barb	brass	0.48	5	30
4CMB6-B-E	1/2"	3/4" Push-Loc	brass	0.51	5	30



(Standard & Push-Loc Hose Barb)

CM-Series Industrial Mold Interchange (Unvalved 45° Coupler)


Part Number	Body Size	Barb Configuration	Body Material	Weight (lb)	Bag Qty	Pack Qty
2CM4S2-B-E	1/4"	1/4" Hose Barb	brass	0.13	10	100
2CM4B2-B-E	1/4"	1/4" Push-Loc	brass	0.13	10	100
2CM4S2.5-B-E	1/4"	5/16" Hose Barb	brass	0.13	10	100
2CM4S3-B-E	1/4"	3/8" Hose Barb	brass	0.13	10	100
2CM4B3-B-E	1/4"	3/8" Push-Loc	brass	0.15	10	100
3CM4S3-B-E	3/8"	3/8" Hose Barb	brass	0.36	10	50
3CM4B3-B-E	3/8"	3/8" Push-Loc	brass	0.34	10	50
3CM4S4-B-E	3/8"	1/2" Hose Barb	brass	0.36	10	50
3CM4B4-B-E	3/8"	1/2" Push-Loc	brass	0.34	10	50
4CM4S4-B-E	1/2"	1/2" Hose Barb	brass	0.74	5	30
4CM4B4-B-E	1/2"	1/2" Push-Loc	brass	0.78	5	30
4CM4S6-B-E	1/2"	3/4" Hose Barb	brass	0.76	5	30

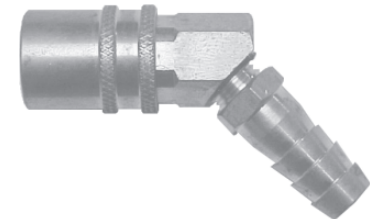

(Standard & Push-Loc Hose Barb)

CM-Series Industrial Mold Interchange (Unvalved 90° Coupler)

Part Number	Body Size	Barb Configuration	Body Material	Weight (lb)	Bag Qty	Pack Qty
2CM9S2-B-E	1/4"	1/4" Hose Barb	brass	0.13	10	100
2CM9B2-B-E	1/4"	1/4" Push-Loc	brass	0.14	10	100
2CM9S2.5-B-E	1/4"	5/16" Hose Barb	brass	0.13	10	100
2CM9S3-B-E	1/4"	3/8" Hose Barb	brass	0.14	10	100
2CM9B3-B-E	1/4"	3/8" Push-Loc	brass	0.16	10	100
3CM9S3-B-E	3/8"	3/8" Hose Barb	brass	0.31	10	50
3CM9B3-B-E	3/8"	3/8" Push-Loc	brass	0.37	10	50
3CM9S4-B-E	3/8"	1/2" Hose Barb	brass	0.33	10	50
3CM9B4-B-E	3/8"	1/2" Push-Loc	brass	0.37	10	50
4CM9S4-B-E	1/2"	1/2" Hose Barb	brass	0.79	5	30
4CM9B4-B-E	1/2"	1/2" Push-Loc	brass	0.83	5	30
4CM9S6-B-E	1/2"	3/4" Hose Barb	brass	0.80	5	30



(Standard & Push-Loc Hose Barb)

Dixon Push-Loc hose barbs are designed to be used with Push-Loc hose only and do not require clamps or ferrules to securely attach to the hose. The Dixon Push-Loc hose barb is compatible with most Push-Loc hoses and are easy to assemble, as per the instructions on page 6.



Attention Required!

CM-Series Industrial Mold Interchange (Valved Coupler)



(Female Thread)

Part Number	Body Size	Thread Size	Body Material	Weight (lb)	Bag Qty	Pack Qty
2CMF1-B	1/4"	1/8"-27 NPT	brass	0.07	10	100
3CMF2-B	3/8"	1/4"-18 NPT	brass	0.21	10	50


CM-Series Industrial Mold Interchange (Valved Coupler)



(Standard & Push-Loc Hose Barb)

Part Number	Body Size	Barb Configuration	Body Material	Weight (lb)	Bag Qty	Pack Qty
2CMS2-B	1/4"	1/4" Hose Barb	brass	0.10	10	100
2CMB2-B	1/4"	1/4" Push-Loc	brass	0.10	10	100
2CMS2.5-B	1/4"	5/16" Hose Barb	brass	0.10	10	100
2CMS3-B	1/4"	3/8" Hose Barb	brass	0.10	10	100
2CMB3-B	1/4"	3/8" Push-Loc	brass	0.13	10	100
3CMS3-B	3/8"	3/8" Hose Barb	brass	0.27	10	50
3CMB3-B	3/8"	3/8" Push-Loc	brass	0.29	10	50
3CMS4-B	3/8"	1/2" Hose Barb	brass	0.28	10	50
3CMB4-B	3/8"	1/2" Push-Loc	brass	0.30	10	50


CM-Series Industrial Mold Interchange (Valved 45° Coupler)



(Standard & Push-Loc Hose Barb)

Part Number	Body Size	Barb Configuration	Body Material	Weight (lb)	Bag Qty	Pack Qty
2CM4S2-B	1/4"	1/4" Hose Barb	brass	0.13	10	100
2CM4B2-B	1/4"	1/4" Push-Loc	brass	0.14	10	100
2CM4S2.5-B	1/4"	5/16" Hose Barb	brass	0.13	10	100
2CM4S3-B	1/4"	3/8" Hose Barb	brass	0.14	10	100
2CM4B3-B	1/4"	3/8" Push-Loc	brass	0.17	10	100
3CM4S3-B	3/8"	3/8" Hose Barb	brass	0.36	10	50
3CM4B3-B	3/8"	3/8" Push-Loc	brass	0.36	10	50
3CM4S4-B	3/8"	1/2" Hose Barb	brass	0.36	10	50
3CM4B4-B	3/8"	1/2" Push-Loc	brass	0.40	10	50

CM-Series Industrial Mold Interchange (Valved 90° Coupler)



(Standard & Push-Loc Hose Barb)

Part Number	Body Size	Barb Configuration	Body Material	Weight (lb)	Bag Qty	Pack Qty
2CM9S2-B	1/4"	1/4" Hose Barb	brass	0.14	10	100
2CM9B2-B	1/4"	1/4" Push-Loc	brass	0.14	10	100
2CM9S2.5-B	1/4"	5/16" Hose Barb	brass	0.14	10	100
2CM9S3-B	1/4"	3/8" Hose Barb	brass	0.15	10	100
2CM9B3-B	1/4"	3/8" Push-Loc	brass	0.17	10	100
3CM9S3-B	3/8"	3/8" Hose Barb	brass	0.31	10	50
3CM9B3-B	3/8"	3/8" Push-Loc	brass	0.37	10	50
3CM9S4-B	3/8"	1/2" Hose Barb	brass	0.35	10	50
3CM9B4-B	3/8"	1/2" Push-Loc	brass	0.39	10	50



Attention Required!

Dixon Push-Loc hose barbs are designed to be used with Push-Loc hose only and do not require clamps or ferrules to securely attach to the hose. The Dixon Push-Loc hose barb is compatible with most Push-Loc hoses and are easy to assemble.

CM-Series Industrial Mold Interchange (Extension Nipple)

Part Number	Body Size	Thread Size	Body Material	Length	Bag Qty	Pack Qty
CM2M1-B-L2.5	1/4"	1/8"-27 NPT	brass	2.5"	10	50
CM2M1-B-L4	1/4"	1/8"-27 NPT	brass	4"	10	50
CM2M1-B-L5.5	1/4"	1/8"-27 NPT	brass	5.5"	10	50
CM2M2-B-L2.5	1/4"	1/4"-18 NPT	brass	2.5"	10	50
CM2M2-B-L4	1/4"	1/4"-18 NPT	brass	4"	10	50
CM2M2-B-L5.5	1/4"	1/4"-18 NPT	brass	5.5"	10	50
CM2M2-B-L7	1/4"	1/4"-18 NPT	brass	7"	10	50
CM3M1-B-L2.5	3/8"	1/8"-27 NPT	brass	2.5"	5	25
CM3M1-B-L4	3/8"	1/8"-27 NPT	brass	4"	5	25
CM3M1-B-L5.5	3/8"	1/8"-27 NPT	brass	5.5"	5	25
CM3M1-B-L7	3/8"	1/8"-27 NPT	brass	7"	5	25
CM3M2-B-L2.5	3/8"	1/4"-18 NPT	brass	2.5"	5	25
CM3M2-B-L4	3/8"	1/4"-18 NPT	brass	4"	5	25
CM3M2-B-L5.5	3/8"	1/4"-18 NPT	brass	5.5"	5	25
CM3M2-B-L7	3/8"	1/4"-18 NPT	brass	7"	5	25
CM3M2-B-L8.5	3/8"	1/4"-18 NPT	brass	8.5"	5	25
CM3M2-B-L11.5	3/8"	1/4"-18 NPT	brass	11.5"	5	25



CM-Series Industrial Mold Interchange (Pressure Plug)

Part Number	Body Size	Material	Weight	Bag Qty	Pack Qty
2CMPC-B	1/4"	brass	.09	10	100
3CMPC-B	3/8"	brass	.12	10	50
4CMPC-B	1/2"	brass	.15	5	30



CM-Series

HC-Series Garden Hose Couplings

- Heavy duty garden hose couplings, ideal for contractor or landscape applications.
- Corrosion resistant materials optimize corrosion resistance in a variety of environments.
- Smooth bore full-flow design ensures maximum flow with minimal pressure drop.
- Available in a variety of end and valved configurations to ensure compatibility in a variety of applications.



Performance Specifications	Operating Bar (PSI)	Min. Burst Bar (PSI)	Flow Rate $\Delta P=1$ Bar	Locking Mechanism
3/4" (HC)	14 (200)	55 (800)	8 LPM (30 GPM)	3 Balls
3/4" (HCP)	14 (200)	55 (800)	8 LPM (30 GPM)	3 Balls

Series Interchange	Parker	Hansen	Tomco	---
3/4" (HC)	---	Series 'GH'	Series 'GH'	---
3/4" (HCP)	1163-Series	---	---	---

HC-Series Garden Hose Interchange (Coupler)



(Female Thread)

Part Number	Body Size	Thread Size	Body Material	Weight (lb)	Bag Qty	Pack Qty
6HCFG6-B	3/4"	3/4"- 11 1/2 garden	brass	0.13	5	50

HC-Series Garden Hose Interchange (Nipple)



(Male Thread)

Part Number	Body Size	Thread Size	Body Material	Weight (lb)	Bag Qty	Pack Qty
HC6MG6-B	3/4"	3/4"- 11 1/2 garden	brass	0.08	5	50

HC-Series Garden Hose Interchange (Nipple)



(Hose Barb)

Part Number	Body Size	Barb Configuration	Body Material	Weight (lb)	Bag Qty	Pack Qty
HC6S5-B	3/4"	5/8" Hose Barb	brass	0.06	5	50
HC6S6-B	3/4"	3/4" Hose Barb	brass	0.05	5	50

HCP-Series Garden Hose Interchange (Coupler)




(Female Thread)

Part Number	Body Size	Thread Size	Body Material	Weight (lb)	Bag Qty	Pack Qty
6HCPFG6-B	3/4"	3/4"- 11 1/2 garden	brass	0.13	5	50
6HCPFG6-B-V	3/4"	3/4"- 11 1/2 garden	brass	0.14	5	50

- V indicates valved model

HCP-Series Garden Hose Interchange (Nipple)



(Male Thread)

Part Number	Body Size	Thread Size	Body Material	Weight (lb)	Bag Qty	Pack Qty
HCP6MG6-B	3/4"	3/4"- 11 1/2 garden	brass	0.08	5	50