



™

Kuriyama of America, Inc.

360 E. State Parkway
Schaumburg, IL 60173-5335 USA

Phone: (847) 755-0360

Toll-Free FAX: (800) 800-0320


International FAX: (847) 885-0996 **Email:** sales@kuriyama.com

Series No. A1661-06X300, Kuri Tec® A1661 Series 3/8 in. Nominal ID and 300 ft Standard Length Coils 600 PSI PVC/Polyurethane Blend Reinforced Spray Hose

Unique PVC/polyurethane blended core provides excellent resistance to hydrocarbon-based lawn care and pest control chemicals. Reinforced with high tensile strength yarn. PVC ribbed cover provides abrasion resistance.

Performance - Plus Three Year Warranty!

Lawn & Pest Control Spraying!

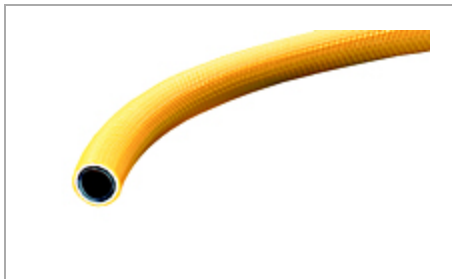

[Construction](#) | [Features](#) | [Applications](#) | [Service Temperature Range](#) | [Nominal Specifications](#) | [Specifications](#) | [Note](#) | [Compliance Footnotes](#)

Construction

Tube	Black PVC/Polyurethane Blend
Reinforcement	High Tensile Strength Yarn Two-Pass Spiral Construction
Cover	Ribbed PVC

Features

- Extremely tough and kink resistant.
- PVC/polyurethane blended core - provides better chemical resistance than comparable all-PVC hoses.
- Ribbed cover provides excellent abrasion-resistance.

Features

- 600 PSI working pressure.
- Pin-pricked cover vents vapor . . . helps prevent ballooning.
- Silicone-free.
- One-piece lengths.
- Phthalate Free!

Applications

Application

- Agricultural spraying.
- Commercial weed spraying.
- Pest control spraying.

Service Temperature Range

Service Temperature [Max]

15 °F
-10 °C

Service Temperature [Min]

160 °F
70 °C

Nominal Specifications

Size Code

06

Nominal ID

3/8 in
9.5 mm

Nominal OD

0.650 in
16.5 mm

**Max. Working Pressure at 70°F
(20°C)**

600 psi

**Max. Working Pressure at 122°F
(50°C)**

350 psi

Standard Coil Lengths

300 ft

Approx. Weight. Per Pkg.

41 lb

Specifications

Brand

Kuri Tec®

Packaging

Coils

Series

A1661

Type

Reinforced Spray Hose

Style

600 PSI PVC/PU Reinforced Spray Hose

Performance

PVC/Polyurethane Core Provides Excellent Chemical Resistance

Note

Note

Note : Use of hydraulic or reusable-type fittings are not recommended for coupling Kuri Tec® hose products. Hose claims involving use of these fittings will be disallowed.

Compliance Footnotes

Compliance Footnotes**Phthalate Free** - Manufactured from all phthalate free material