

Kuri Tec®



CLEARBRAID®
K3150 Series RF
Standard Wall PVC Food & Beverage Hose

A lightweight standard wall crystal clear yarn reinforced hose suitable for a wide variety of food and beverage applications.

Construction:

Crystal clear PVC compound, formulated with ingredients in compliance with applicable FDA⁽⁰³⁾ requirements, meets USDA⁽¹⁷⁾, 3A⁽⁰¹⁾, NSF⁽¹³⁾, UL⁽¹⁶⁾, RoHS⁽¹⁵⁾ and USP⁽¹⁸⁾ Class VI criteria. Reinforced with spiraled polyester yarn and longitudinal orange tracer yarns for identification.

Features:

- Constructed with non-toxic compounds.
- NSF-51 certified material.
- Crystal clear — allows visual confirmation of product flow.
- Longitudinally-reinforced to reduce elongation under pressure.

- Light weight.
- Self-extinguishing.
- Non-marking.
- Silicone-free.
- Non-conductive.
- One-piece lengths.
- Resistant to chemicals (see chemical-resistance chart).
- Compound hardness 73 ±3 Shore "A".

Applications:

- Food & beverage dispensing.
- Deionized water.
- Liquid food products.
- Air and water lines.
- Powdered food products.
- Potable water transfer.
- Air breathing lines.
- Pneumatic lines.
- Packaging machines.

Service Temperature Range: +25°F (-4°C) to +150°F (+65°C)

Nominal Specifications

Series No.	Size Code	Nominal ID		Nominal OD		Max. Working Pressure† (PSI)		Standard Lengths		Approx. Wt. per Pkg.	
		(In)	(mm)	(In)	(mm)	@ 70°F (20°C)	@ 122°F (50°C)	Full Coil	Cut Length	Full Coil	Cut Length
K3150	03	3/16	4.8	.375	9.5	250	150	300 ft.	100 ft.	13 lbs.	4 lbs.
K3150	04	1/4	6.5	.438	11.1	250	150	300 ft.	100 ft.	17 lbs.	6 lbs.
K3150	05	5/16	7.9	.531	13.5	250	135	300 ft.	100 ft.	24 lbs.	8 lbs.
K3150	06	3/8	9.5	.594	15.1	225	125	300 ft.	100 ft.	27 lbs.	9 lbs.
K3150	08	1/2	12.7	.750	19.1	200	100	300 ft.	100 ft.	40 lbs.	13 lbs.
K3150	10	5/8	15.9	.891	22.6	200	100	200 ft.	100 ft.	35 lbs.	18 lbs.
K3150	12	3/4	19.1	1.031	26.2	150	85	200 ft.	100 ft.	43 lbs.	22 lbs.
K3150	16	1	25.4	1.300	33.0	125	75	200 ft.	100 ft.	59 lbs.	30 lbs.
K3150	20	1 1/4	31.8	1.620	41.1	100	55	100 ft.	50 ft.	45 lbs.	23 lbs.
K3150	24	1 1/2	38.1	1.938	49.2	100	50	100 ft.	50 ft.	64 lbs.	32 lbs.
K3150	32	2	50.8	2.490	63.2	75	35	100 ft.	50 ft.	94 lbs.	47 lbs.
K3150	MM04	.157	4.0	.354	9.0	250	150	—	100 ft.	—	4 lbs.
K3150	MM06	.236	6.0	.433	11.0	250	150	—	100 ft.	—	6 lbs.
K3150	MM08	.315	8.0	.531	13.5	250	135	—	100 ft.	—	8 lbs.
K3150	MM10	.394	10.0	.630	16.0	225	125	—	100 ft.	—	10 lbs.
K3150	MM12	.472	12.0	.709	18.0	200	100	—	100 ft.	—	12 lbs.
K3150	MM19	.748	19.0	1.024	26.0	150	85	—	100 ft.	—	21 lbs.



† Note: Working Pressure decreases as temperature increases. Pressure ratings can only be obtained with proper coupling procedures. Use of compression fittings with Kuri Tec® yarn-reinforced hose is not recommended. Hose claims involving use of these fittings will be disallowed.

CLEARBRAID® is a registered trademark of Accuflex Industrial Hose, Ltd. and is used under license by Kuriyama of America, Inc.


NOTE: For details of the following compliances mentioned above, refer to footnotes listed on page 63.

3A⁽⁰¹⁾, FDA⁽⁰³⁾, NSF⁽¹³⁾, RoHS⁽¹⁵⁾, UL⁽¹⁶⁾, USDA⁽¹⁷⁾, USP⁽¹⁸⁾

Please refer to the back page for the location of your nearest warehouse for availability of products/sizes shown.

BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS OR DISCONTINUE PRODUCTS WITHOUT PRIOR NOTICE.

CLEARBRAID® K3130 Series BF Heavy Wall PVC Food & Beverage Hose

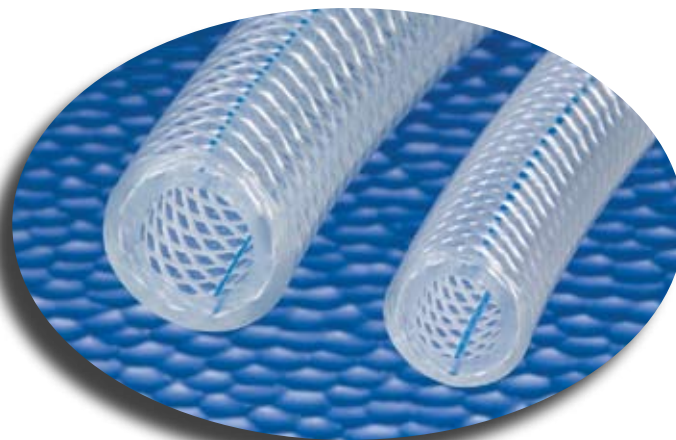

A heavier walled crystal clear yarn reinforced hose suitable for a wide variety of food and beverage applications.

Construction:

Crystal clear PVC compound, formulated with ingredients in compliance with applicable FDA⁽⁰³⁾ requirements, meets USDA⁽¹⁷⁾, 3A⁽⁰¹⁾, NSF⁽¹³⁾, UL⁽¹⁶⁾, RoHS⁽¹⁵⁾ and USP⁽¹⁸⁾ Class VI criteria. Reinforced with spiraled polyester yarn and longitudinal blue tracer yarns for identification.

Features:

- Constructed with non-toxic compounds.
- NSF-51 certified material.
- Crystal clear — allows visual confirmation of product flow.
- Longitudinally-reinforced to reduce elongation under pressure.
- Light weight.
- Self-extinguishing.
- Non-marking.

- Silicone-free.
- One-piece lengths.
- Resistant to chemicals (see chemical-resistance chart).
- Compound hardness 73 ±3 Shore “A”.

Applications:

- Food & beverage dispensing.
- Deionized water.
- Liquid food products.
- Air and water lines.
- Powdered food products.
- Potable water transfer.
- Air breathing lines.
- Pneumatic lines.
- Packaging machines.

Service Temperature Range: +25°F (-4°C) to +150°F (+65°C)

Nominal Specifications

Series No.	Size Code	Nominal ID		Nominal OD		Max. Working Pressure† (PSI)		Standard Lengths		Approx. Wt. per Pkg.	
		(In)	(mm)	(In)	(mm)	@ 70°F (20°C)	@ 122°F (50°C)	Full Coil	Cut Length	Full Coil	Cut Length
K3130	02	1/8	3.2	.328	8.3	350	200	300 ft.	100 ft.	12 lbs.	4 lbs.
K3130	03	3/16	4.8	.406	10.3	350	200	300 ft.	100 ft.	17 lbs.	6 lbs.
K3130	04	1/4	6.5	.500	12.7	350	200	300 ft.	100 ft.	24 lbs.	8 lbs.
K3130	05	5/16	7.9	.563	14.3	275	160	300 ft.	100 ft.	28 lbs.	9 lbs.
K3130	06	3/8	9.5	.625	15.9	275	145	300 ft.	100 ft.	32 lbs.	11 lbs.
K3130	08	1/2	12.7	.813	20.7	250	130	300 ft.	100 ft.	52 lbs.	17 lbs.
K3130	10	5/8	15.9	1.000	25.4	225	125	200 ft.	100 ft.	52 lbs.	26 lbs.
K3130	12	3/4	19.1	1.125	28.6	200	120	200 ft.	100 ft.	60 lbs.	30 lbs.
K3130	16	1	25.4	1.375	34.9	150	85	200 ft.	100 ft.	76 lbs.	38 lbs.
K3130	20	1 1/4	31.8	1.750	44.5	125	75	100 ft.	50 ft.	64 lbs.	32 lbs.
K3130	24	1 1/2	38.1	2.000	50.8	100	65	100 ft.	50 ft.	75 lbs.	38 lbs.
K3130	32	2	50.8	2.500	63.5	75	55	100 ft.	50 ft.	96 lbs.	48 lbs.

† Note: Working Pressure decreases as temperature increases. Pressure ratings can only be obtained with proper coupling procedures. Use of compression fittings with Kuri Tec® yarn-reinforced hose is not recommended. Hose claims involving use of these fittings will be disallowed.

CLEARBRAID® is a registered trademark of Accuflex Industrial Hose, Ltd. and is used under license by Kuriyama of America, Inc.

NOTE: For details of the following compliances mentioned above, refer to footnotes listed on page 63.

3A⁽⁰¹⁾, FDA⁽⁰³⁾, NSF⁽¹³⁾, RoHS⁽¹⁵⁾, USDA⁽¹⁷⁾, UL⁽¹⁶⁾, USP⁽¹⁸⁾

Please refer to the back page for the location of your nearest warehouse for availability of products/sizes shown.

Kuri Tec®

THE CLEAR EVOLUTION!


- CRYSTAL CLEAR PVC • GLASS SMOOTH INTERIOR
- ABRASION RESISTANT • COMPLIES WITH - 3A⁽⁰¹⁾, FDA⁽⁰³⁾, NSF⁽¹³⁾, RoHS⁽¹⁵⁾, USDA⁽¹⁷⁾

POLYWIRE® PLUS SERIES K7300

- Wire Reinforced For Vacuum and Static Dissipation
- Yarn Reinforced For Pressure
- Kink Resistant for Tight Bends




POLYWIRE® PLUS
THE BEST OF BOTH DESIGNS
IN ONE HOSE!

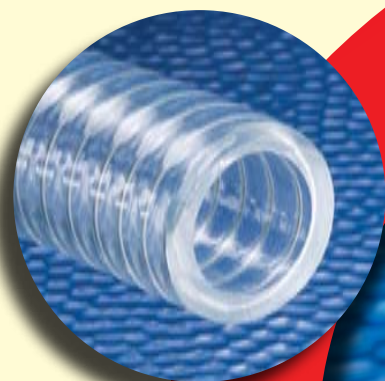


POLYWIRE®
Series K7130
Heavy Wall


- Helical Wire
- Full Vacuum
- Grounding Wire for Static Dissipation
- Kink Resistant Design



POLYSPRING®
Series K7160
Standard Wall



CLEARBRAID® Series K3130
Heavy Wall




CLEARBRAID®
Series K3150
Standard Wall

- Yarn Reinforced for High Pressure Applications

NOTE: For details of the following compliances mentioned above, refer to footnotes listed on page 63.

Kuri Tec®

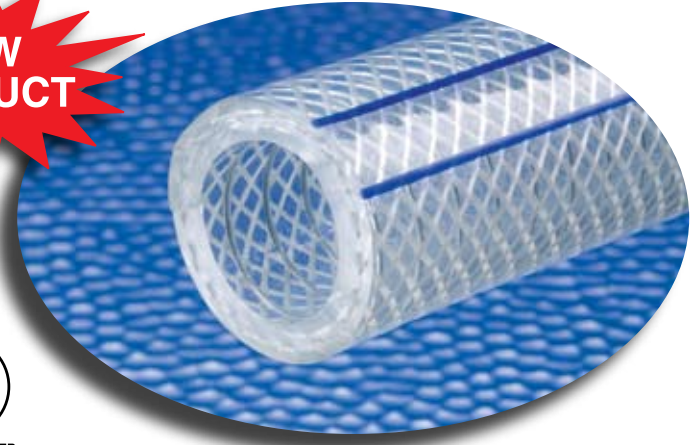

POLYWIRE® PLUS Series K7300 Hose Heavy Wall Wire-Yarn Reinforced Vacuum/ Pressure Hose



A unique crystal clear PVC hose suitable for applications requiring a vacuum hose with higher pressure capability or as a pressure hose with vacuum capability.

Construction:

- Crystal clear PVC compound reinforced with high tensile yarns and helically-wound spring steel wire.
- The inner food contact surface is made with PVC compound formulated with ingredients in compliance with applicable FDA⁽⁰³⁾ requirements, meets USDA⁽¹⁷⁾, 3A⁽⁰¹⁾, NSF⁽¹³⁾ and RoHS⁽¹⁵⁾ criteria.

Features:

- Wire helix reinforcement prevents kinking or collapsing... hose diameter will not expand under normal rated working pressures.
- 29.9" Hg vacuum rating @ 70°F.
- Electrogalvanized helical steel wire can be used for static dissipation (see below ††).
- Yarn reinforcement provides higher working pressure.
- Heavy duty construction prevents hose O.D. from expanding and I.D. from collapsing.

- Crystal clear – allows visual confirmation of product flow
- Glass-smooth interior – reduces material buildup.
- Inner contact surface material is NSF certified for food applications (standard 51). It also meets other criteria such as 3A and USDA.
- Resistant to chemicals (see chemical-resistance chart in Kuri Tec Catalog).
- Self-extinguishing.
- Non-marking.
- Non-toxic.
- Silicone-free.

Applications:

- Pressure and vacuum applications which require excellent kink resistance.
- Ideal for applications which require the hose to withstand both high vacuum and pressure.
- Water transfer.
- Liquid food transfer.

Service Temperature Range: +15°F (-9°C) to +150°F (+65°C)

Nominal Specifications



Series No.	Size Code	Nominal ID		Nominal OD		Maximum Working Pressure† (PSI)		Standard Length Coils	Approx. Wt. per Pkg.	Min. Bend Radius @ 70°F
		(In)	(mm)	(In)	(mm)	@ 70°F (20°C)	@ 122°F (50°C)			
K7300	08	1/2	12.7	.906*	23.0*	250	125	25/50/100 ft.	6.5/13/26 lbs.	2"
K7300	12	3/4	19.1	1.196*	30.4*	225	112	25/50/100 ft.	10/20/40 lbs.	2 1/2"
K7300	16	1	25.4	1.464*	37.2*	225	112	25/50/100 ft.	13.3/26.5/53 lbs.	3 1/2"
K7300	20	1 1/4	31.8	1.780*	45.2*	175	87	25/50 ft.	18.5/37 lbs.	4 1/2"
K7300	24	1 1/2	38.1	2.030*	51.6*	175	87	25/50 ft.	21.5/43 lbs.	5 1/2"
K7300	32	2	50.8	2.600*	66.0*	150	75	25/50 ft.	32/64 lbs.	7"

† Note: Working Pressure decreases as temperature increases. Pressure ratings can only be obtained with proper coupling procedures.

Use of compression fittings with Kuri Tec® yarn-reinforced hose is not recommended. Hose claims involving use of these fittings will be disallowed.

†† Caution: This product is designed to dissipate static electricity when the metal wire is properly connected to ground, through the fitting or other means.

NOTE: For details of the following compliances mentioned above, refer to footnotes listed on page 63.

3A⁽⁰¹⁾, FDA⁽⁰³⁾, NSF⁽¹³⁾, RoHS⁽¹⁵⁾, USDA⁽¹⁷⁾

Please refer to the back page for the location of your nearest warehouse for availability of products/sizes shown.

BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS OR DISCONTINUE PRODUCTS WITHOUT PRIOR NOTICE.